


BJT - 3/20/2018 9:20 AM - U:\2017\201701 NewCar\Eng\Cad\Eng_Dwg\170101TR_PL01.dwg

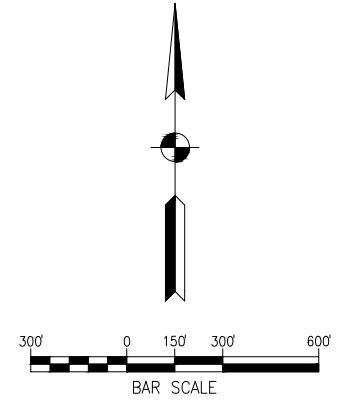

LEGEND:

- Crack Fill
- Slurry Seal Type 2 on Crack Fill

NOTES:

1. The contractor shall not disrupt traffic on Timothy Rd. / Race St. for more than two consecutive intersections.
2. Temporary detour routes will be required for work on Timothy Rd. / Race St. The contractor shall submit detour routes to the engineer prior to starting work.
3. The contractor shall maintain access to businesses and residents at all times during the project.
4. All flagging operations shall be in accordance with INDOT Standard Drawings Section E-801-TCFO.

PAVEMENT PRESERVATION		
Street Name	Crack Fill (Syd)	Slurry Seal (Syd)
Timothy Rd. / Race St.	7,450	
Jon St.	3,186	3,186
Elm St.	4,826	394
Hancz St.	389	389
Front St.	2,091	2,091
Filbert St.	2,546	2,546
Chestnut St.	5,099	5,099
Ada St.	5,647	5,647
Arch St.	2,414	2,414
Lyn Dee St.	857	857
Chapman Dr.	3,684	3,684
Dunn Rd.	5,554	5,554
Tiger Ct.	1,111	1,111
Bourissa Ct.	1,254	1,254
Gentry Ln.	4,965	4,965
Hilltop Ct.	538	538
Marvel Ln.	6,911	6,911
Meridian St.	2,044	2,044
Total:	60,566	48,684

LFA
LAWSON-FISHER ASSOCIATES P.C.
 525 W. WASHINGTON AVENUE
 SOUTH BEND, INDIANA 46601
 PH. (574) 234-3167

SIGNATURE	DATE

TOWN OF NEW CARLISLE, INDIANA
2017 COMMUNITY CROSSINGS
PAVEMENT PRESERVATION PROJECT

PLAN AND
TABLE

REVISIONS	HORIZONTAL SCALE 1" = 300'	VERTICAL SCALE	PROJECT NUMBER 201701.00
DRAWN: <u>BJT</u>	SURVEY BOOK		SHEETS
CHECKED: <u>JMH</u>	DATE DECEMBER 2017		2 OF 2